



# bmf<sup>®</sup> Metal Forms

## O-K Straight Sidewalk Forms

Here are forms built to help you knock out those bread-and-butter jobs—pouring sidewalks. These forms are light but rugged. O-K Sidewalk Forms have a husky double flange at the top and a single flange at the bottom. Actual strength tests and years of experience have shown that this flange design has more than enough strength with the least amount of weight. The open flange on the bottom is easily flushed to remove spilled concrete.



O-K Sidewalk Forms feature the BMF **slide cam lock**. Here is an end lock made of tough 3/16-inch steel that needs no babying; a sharp blow with a hammer positively locks up the ends of the form in perfect alignment. The exclusive run-up wedge does the trick, locking the forms both vertically and horizontally. And they don't bind either, because every slide is hand fitted with a load button to the form to take up part of the locking stress and to prevent jam up from spilled concrete or dirt.

The **O-K stake pocket** with the 3/8-inch thick giant wedge is a special feature of BMF forms. This stake pocket, which locks the forms securely to the stakes, is electrowelded to give extreme rigidity and durability. Its V-shape and its large open bottom makes it easy to remove spilled concrete.

Because of these features, this line of forms is truly "O-K" to many of the country's concrete contractors.

## Jaquith Industries Inc.

600 East Brighton Ave.  
PO Box 780  
Syracuse, NY  
13205-0780  
315-478-5700  
Fax: 315-478-5707

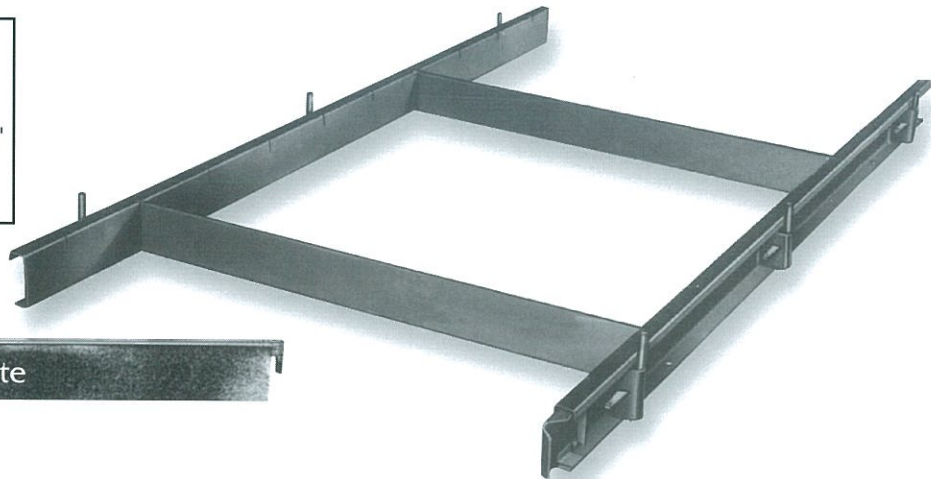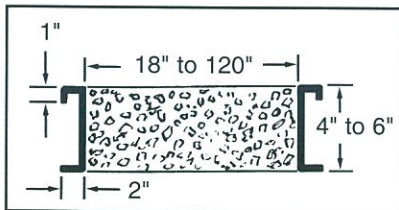

Division Plate

### Specifications

#### O-K Straight Forms

Height, in.	4, 5, 6"
End Connection	Slide Cam Lock 3/16 in. thick
Division Plate Slots	10 per form (12 in. spacing)
Length, ft.	10 (three stake pockets)

\*Same as O-K 6" Gutter Form

**Note:** For stacking options please call Jaquith for technical data.


#### Division Plates

Widths, in.	18, 24, 30, 36, 48, 60, 72, 96, 108, 120
Heights, in.	4, 5, 6 One division plate required per each joint. Please specify height and width when ordering.



#### O-K Stake Pocket

1. Maximum rigidity; pocket electrowelded to support top flange.
2. Full height pocket; stake locked in contact with whole length of pocket.
3. Wide V-neck throat.
4. Giant wedge, 3/8 inch thick; dimpled for retaining; no chain needed.

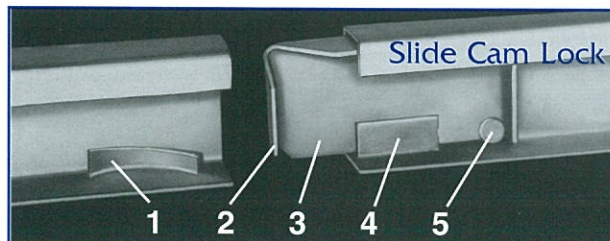

#### Slide Cam Lock

1. Run-up wedge
2. Slide cam surface
3. Slide
4. Slide retainer
5. Load button